


PERFORMANCE INSPIRED SUPER RAPID THREAD II FILM CARRIAGE

The Super Rapid Thread II has:

- The largest film to pre-stretch roller contact area of any machine on the market
- Only one floating nip roller on the access door that automatically aligns every time you close the door
- 2 nip/idler rollers are rigidly fixed (cannot move)
- No spring-loaded nip rollers
- Patented threading device for ease of threading
- One of the few carriages on the market that correctly puts the sticky side of the film against both the pre-stretch rollers and the inside of the load
- Safety electrical interlock - shuts the power off when the carriage access door is open
- Carriage anti-fall device. If the chain breaks the film carriage cannot fall
- Carriage descent obstruction plate. Stops the carriage descent if an obstacle is detected

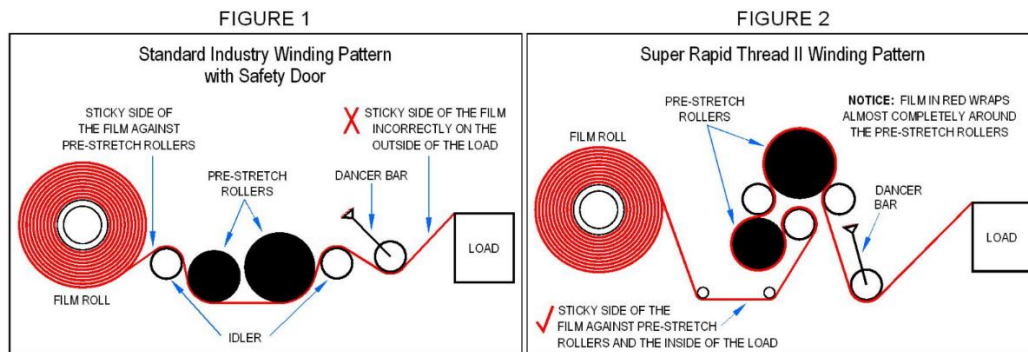

POPULAR OPTIONS FOR THE SUPER RAPID THREAD FILM CARRIAGE THAT PROVIDE ADDITIONAL BENEFITS

AUTOMATIC FILM CUTTER (option OAFC)

The operator normally has two functions:

- Attach the film to the load and start the wrapping cycle by pushing a button.
- When the wrap cycle is completed, cut the film, and dress the film tail either by wiping or tucking.

The Automatic Film Cutter device eliminates the need to cut the film, saving the operator a trip off the forklift. The benefits are:

- If loading by forklift, the number of times the operator is required to get off and on the lift is reduced 50%. This option could eliminate approximately 6,500 trips a year when wrapping only 25 pallets a day.
- If using manual pallet jacks or forklifts or both, the number of times the operator is required to bend over to cut the film is reduced 50%. This option saves time and reduces the possibility of injuries caused by continuous bending over.

PALLET LOCK ROPING DEVICE (option OPLRD)

The most effective method of securing the load to the pallet or skid. Easily programmed using the standard Microprocessor and touchscreen to apply the roped or normal full web film for the following benefits:

- Lock, secure and contain product to the pallet especially unusual shapes
- Prevent the film from tearing on sharp pallet corners
- Increase load containment where necessary without breaking the film
- Create air flow and ventilation for your product
- Includes a quiet, self-contained, and guarded air compressor.

Standard Roping programs:

- Rope Base off/on Base Roping Revolutions (0-9)
- Rope Ascending off/on
- Rope Top off/on
- Top Roping Revolutions (0-9)
- Rope Descending off/on